


# Front Suspension Adjustments


## Fork Oil Capacity (DE type):

### Standard 0.46 kgf/mm (25.76 lbf/in) Fork Spring

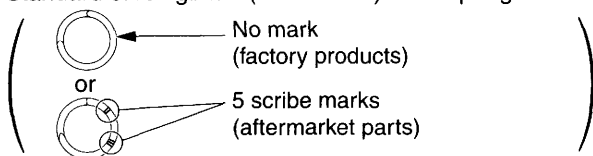


Standard oil capacity	400 cm <sup>3</sup> (13.5 US oz, 14.1 Imp oz)	
Maximum oil capacity	419 cm <sup>3</sup> (14.2 US oz, 14.7 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	323 cm <sup>3</sup> (10.9 US oz, 11.4 Imp oz)	Slightly softer as it nears full compression.

### Optional Softer 0.44 kgf/mm (24.64 lbf/in) Fork Spring

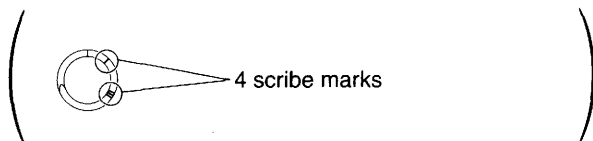

Standard oil capacity	405 cm <sup>3</sup> (13.7 US oz, 14.3 Imp oz)	
Maximum oil capacity	424 cm <sup>3</sup> (14.3 US oz, 14.9 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	328 cm <sup>3</sup> (11.1 US oz, 11.5 Imp oz)	Slightly softer as it nears full compression.

## Optional Stiffer 0.48 kgf/mm (26.88 lbf/in) Fork Spring

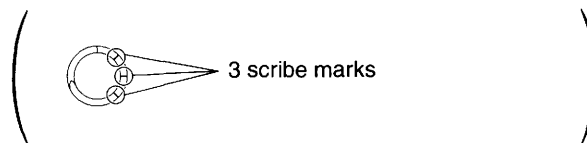

Standard oil capacity	394 cm <sup>3</sup> (13.3 US oz, 13.9 Imp oz)	
Maximum oil capacity	413 cm <sup>3</sup> (14.0 US oz, 14.5 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	317 cm <sup>3</sup> (10.7 US oz, 11.2 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.